




Superior Decontamination
Device for Combating Viruses,
Bacteria and Harmful
Contaminants



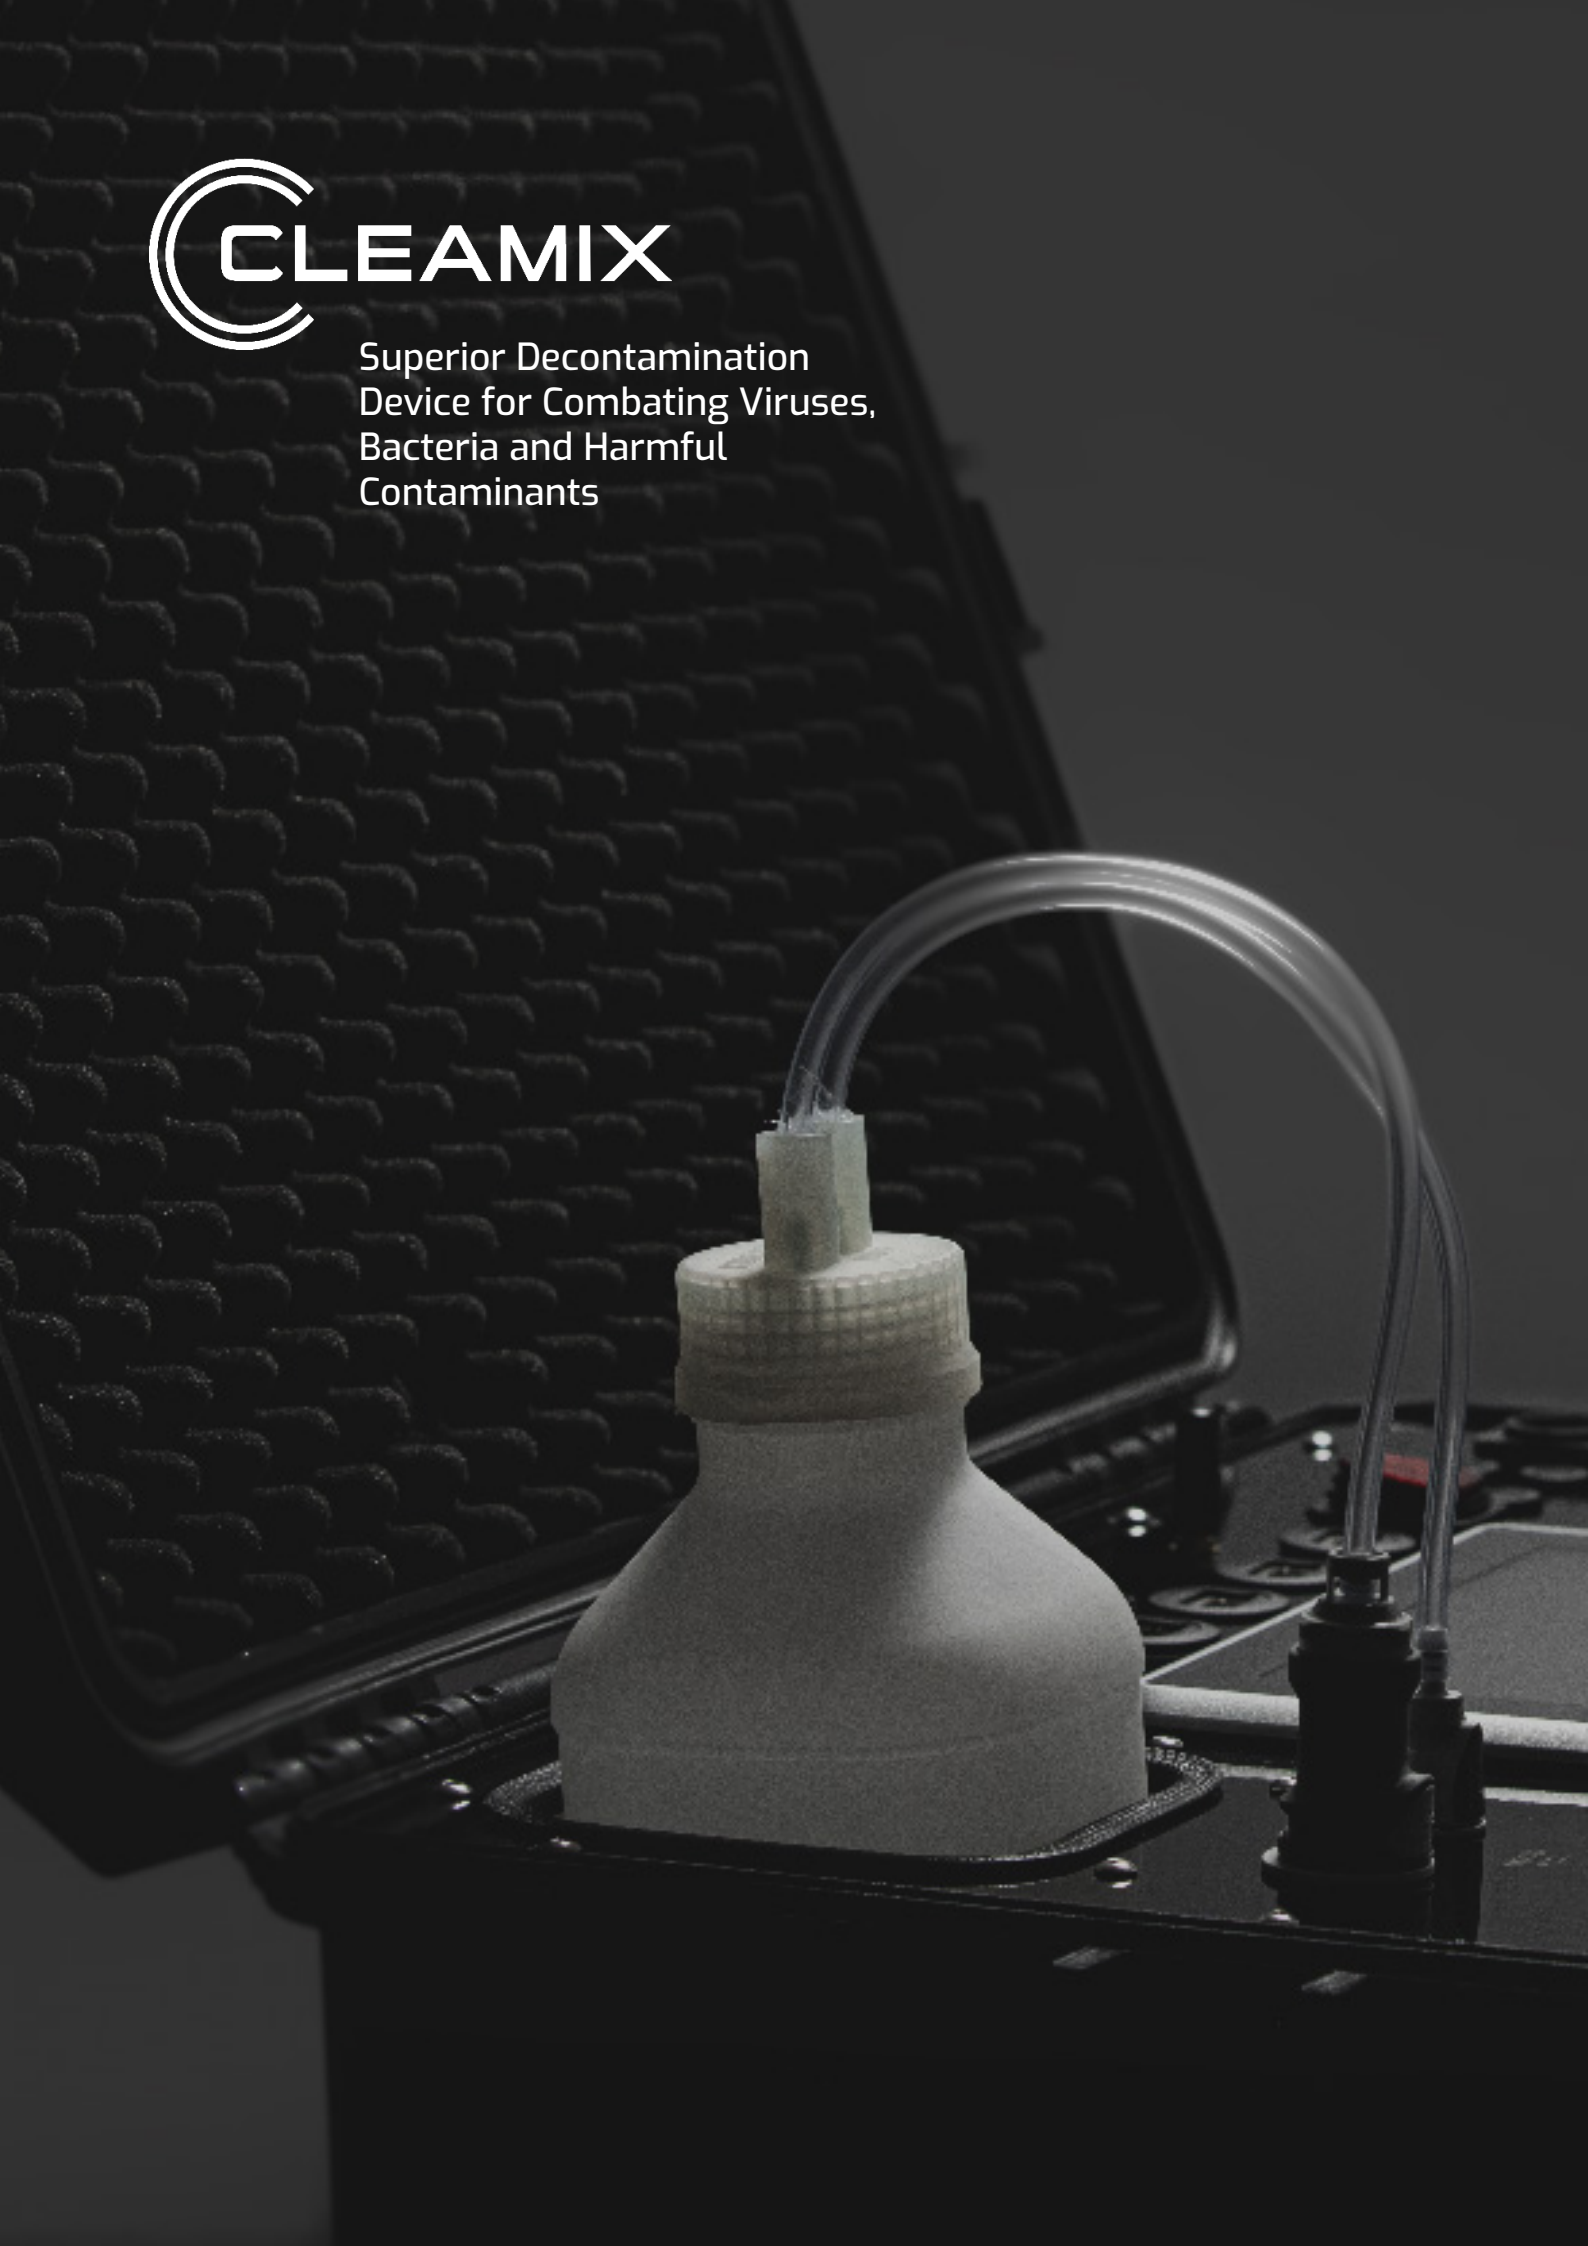

**Built on a new innovation
for H₂O₂ vaporisation.
Our smart, powerful, and
easily portable decontamination
units eliminate all harmful
contaminants safely on
any surface.**

Cleamix is a revolutionary solution for the decontamination of logistics facilities, transport vehicles & containers, sterile disposable equipment, hospitals, and packaging materials.

Established in 2016, Cleamix decontamination system was initially designated for neutralizing chemical warfare agents in military use. It was co-developed with Finnish Defence Forces and National Research Laboratory of Finland (VTT).

Our solution provides stable generation and adequate distribution of H₂O₂ agent together with high quality monitoring. Accurate and repeatable decontamination conditions ensure correct contact times for > 6-log microbial reduction.

Operating principles

Superior solution to conventional bio-contamination methods and systems.

Simple to set-up and operate

Compact, briefcase-sized unit is designed for mobile decontamination. Superior hydrogen peroxide vapour generation than any other comparable device. Just specify desired H_2O_2 concentration and duration, and the unit takes care of the rest.

One liter of H_2O_2 liquid goes a long way

80% efficiency* using 30-60% hydrogen peroxide aqueous solution H_2O_2 solution, resulting in 335 minutes of operation at full power. Accurate and repeatable decontamination conditions for > 6-log microbial reduction. Risk of hydrogen peroxide condensation accumulating on surfaces is minimized.

New standard setting technology

State of art sensors for real time monitoring of H_2O_2 concentration and condensation point; real time adjustment of H_2O_2 vapor output, heating and air-drying to maintain desired decontamination parameters.

Reliable and consistent results

Hydrogen peroxide (H_2O_2) vapour provides excellent penetration into hard to reach locations. Sporocidal efficiency of H_2O_2 vapour is activated already at 100-700 ppm concentrations. Additional fans are used for optimal air circulation to secure H_2O_2 vapour distribution.

Intuitive user experience

Sophisticated Cleamix control software enables hydrogen peroxide and water vapor levels to be maintained below saturation point. User Interface by touch screen on the Master Unit and computer/tablet/phone via cable or WiFi. Automatic process control based on real time sensor data and program parameters (temperature, RH, RS, concentration in ppm).

Use biocides safely. Always read labels and product information before use.

** using 50% H_2O_2 solution with flow rate of 1725 ppm/min/m³ at injection rate of 3 ml/min*

New scalable decontamination solution



Sophisticated Cleamix control software enables hydrogen peroxide- and water vapor levels to be maintained below saturation point and risk of H_2O_2 condensation accumulating on surfaces is minimized.

All Cleamix products are available through our partner network. We continue to build our partner network for global reach.

Flexible payments also available.

For more information:
sales@cleamix.com



Cleamix Ltd
Mekaanikonkuja 6
70900 Toivala
Finland

www.cleamix.com